




主要功能和特点 Main functions and characteristics

智能多媒体箱为我公司专利产品,是智能家居各弱电系统在家中的多媒体集成信息箱,采用暗装形式、模块化结构。智能多媒体箱可安装增强有线电视/数据/语音接线模块、8位RJ45插座接线模块(Patch Panel)、保安监控接线模块、家用集线器(HUB)模块等,典型箱体从小到依次HIB-20S型、HIB-20M型、HIB-20L型3种,也可根据用户所选功能模块的数量及实际需求进行特殊设计(订货时注明特殊要求)。



Intelligent multimedia box is the multimedia integrated information box for various light current systems in intelligent family appliances. Adopting built-in form and modularization structure. Intelligent multimedia box can be equipped with enhanced cable television/data/phone connecting module, 8 way RJ45 socket connecting module (Patch Panel), security monitoring connecting module and household concentrator (HUB) module etc. Typical box from small to big is HIB-20S type, HIB-20M type and HIB-20L type. Special design also can be performed according to the chosen function module quantity and actual requirements. (Indicate special requirements when ordering.)

安装尺寸图 Installation and dimension diagram

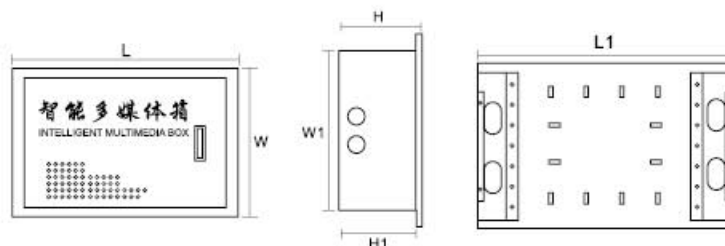

箱体规格尺寸 Spec. & dimension for cabinet

型号 Type	L mm	W mm	H mm	L1 mm	W1 mm	H1 mm	产品配置 Product disposition
YFDMX1000-S	323	220	100	300	196	100	语音: 1进3出 数据: 1进3出 电视: 1进4出—4台电视可同时收看 注: 空档板为选装件 Phone: 1 in 3 out Data: 1 in 3 out TV: 1 in 4 out—4 TV work at the same time Note: Blank plate is a selective assembly unit.
YFDMX1000-HUB	323	220	105	300	196	100	语音: 2组2进3出 数据: 1进4出(HUB集线器)—可同时上网 电视: 1进4出—4台电视可同时收看 弱电转接: 6路安防(带1路视频)信号和三表出线转接 注: 空档板为选装件, 需另配电源。 Phone: 2 groups 2 in 3 out Data: 1 in 4 out (HUB concentrator)—can go to internet at the same time TV: 1 in 4 out—4 TV work at the same time Light current switching: 6 line security guard (with 1 line video) signal and three meters outlet switching. Note: Blank plate is a selective assembly unit, power should be additionally equipped.
YFDMX1000-3	323	220	105	300	196	100	语音: 1进4出 数据: 1进4出 电视: 1进4出—4台电视可同时收看 注: 空档板为选装件 Phone: 1 in 4 out Data: 1 in 4 out TV: 1 in 4 out—4 TV work at the same time. Note: Blank plate is a selective assembly unit.
YFDMX1000-4	320	240	120	300	196	100	语音: 2进6出 数据: 1进4出(HUB集线器)—可同时上网 电视: 1进4出—4台电视可同时收看 弱电转接: 6路安防(带1路视频)信号和三表出线转接 注: 空档板为选装件, 需另配电源。 Phone: 2 in 6 out Data: 1 in 4 out (HUB concentrator)—can go to internet at the same time TV: 1 in 4 out—4 TV work at the same time Light current switching: 6 line security guard (with 1 line video) signal and three meters outlet switching. Note: Blank plate is a selective assembly unit, power should be additionally equipped.
YFDMX1000-GHL	420	295	120	400	250	100	语音: 1进6出(具有交换功能) 数据: 1进4出(HUB集线器)—可同时上网 电视: 1进4出—4台电视可同时收看 弱电转接: 6路安防(带1路视频)信号和三表出线转接 音视频: 2进6出, 1至9路背景音乐功放(任选) 注: 空档板为选装件, 需另配电源。 Phone: 1 in 6 out (with exchange function) Data: 1 in 4 out (HUB concentrator)—can go to internet and watch TV at the same time, 1 in 4 out—4 TV work at the same time. Light current switching: 6 line security guard (with 1 line video) signal and three meters outlet switching. AV: 2 in 6 out, 1-9 line background music power amplifier (for option). Note: Blank plate is a selective assembly unit, power should be additionally equipped.

注: 可按客户要求定制 Note: Can custom according to user's requirements.